

# B200008

# DF11



- ▶ 主要技术特性 (Main Specifications)
- ▶ 适用导线规格 (Applicable wire) : AWG28#~24#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 3A AC, DC
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 800V AC/minute

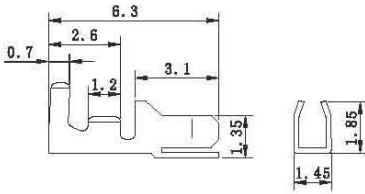
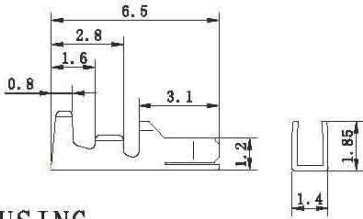
### 材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.2mm	镀锡 Tin-plated

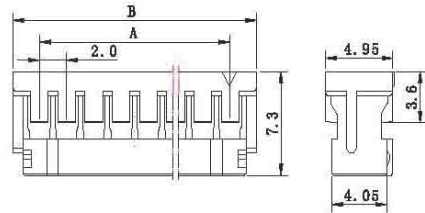
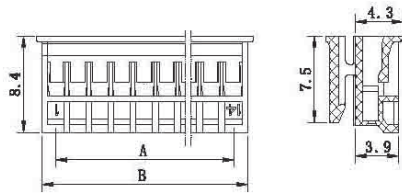
### 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 

#### TERMINAL

**B200008-4**    **DF11**

**B200008-4-1**    **YST200**


#### HOUSING

**B200008-2**

**B200008-2A**


#### HOUSING

极数 Circuits	型号 Type	尺寸(Dimensions)mm		备注型号 P. S. Type
		A	B	
12	B200008-2-12	10.0	14.0	DF11-12DS-2C
16	B200008-2-16	14.0	18.0	DF11-16DS-2C
24	B200008-2-24	22.0	26.0	DF11-24DS-2C
28	B200006-2-28	26.0	30.0	DF11-28DS-2C
32	B200006-2-32	30.0	34.0	DF11-32DS-2C

#### HOUSING

极数 Circuits	型号 Type	尺寸(Dimensions)mm		备注型号 P. S. Type
		A	B	
6	B200008-2A-6	10.0	12.7	PHD-06P
8	B200008-2A-8	14.0	16.7	PHD-08P
10	B200008-2A-10	18.0	20.7	PHD-10P
12	B200006-2A-12	22.0	24.7	PHD-12P
14	B200006-2A-14	26.0	28.7	PHD-14P